	GOTOP GT-2217-SF
	Ultra High Sensitivity and Low Power GPS Receiver Module
www.gotop-zzu.com	

General Description

The Gotop GT-2217-SF is a complete GPS engine module that features super sensitivity, ultra low power and small form factor. The GPS signal is applied to the antenna input of module, and a complete serial data message with position, velocity and time information is presented at the serial interface with NMEA protocol or custom protocol.

Its -159dBm tracking sensitivity extends positioning coverage into place like urban canyons and dense foliage environment where the GPS was not possible before. The small form factor and low power consumption make the module easy to integrate into portable device like PNDs, mobile phones, cameras and vehicle navigation systems.

Applications

- LBS (Location Based Service)
- PND (Portable Navigation Device)
- Vehicle navigation system
- Mobile phone



Figure 1: GT-2217-SF Top View

Features

- Build on high performance, low-power SIRFIII chipset
- Ultra high sensitivity: -159dBm
- Extremely fast TTFF at low signal level
- Built in high gain LNA
- Low power consumption: Max 45mA@3.0V
- NMEA-0183 compliant protocol or custom protocol
- Operating voltage: 2.95V to 3.6V
- Operating temperature range: -40 to 85°C
- SMD type with stamp holes
- Small form factor: 22.4x17x3.0mm
- RoHS compliant (Lead-free)

Pin Assignment

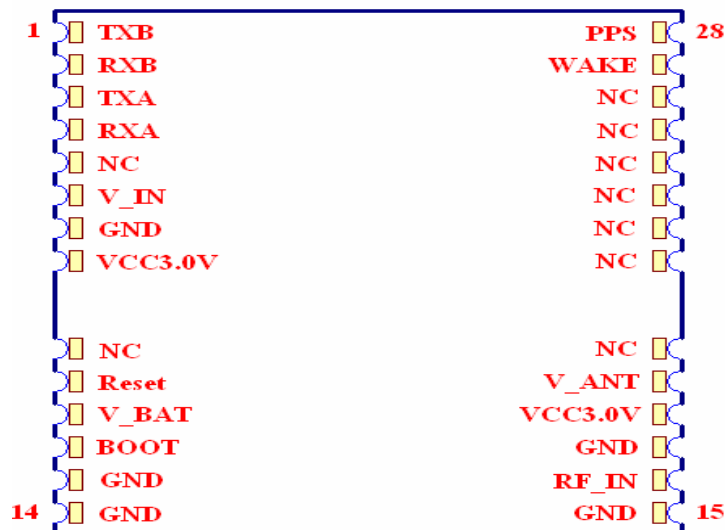


Figure 2: GT-2217-SF Pin Package

Performance Specification

Parameter	Specification	
Receiver Type	L1 frequency band, C/A code, 20-channels	
Sensitivity	Tracking	-159dBm
	Acquisition	-155dBm
Accuracy	Position	5m CEP without SA
	Velocity	0.1m/s without SA
	Timing (PPS)	60ns RMS
Acquisition Time	Cold Start	48s
	Warm Start	35s
	Hot Start	1s
	Re-Acquisition	<1s
Power Consumption	Tracking	40mA @3V Vcc
	Acquisition	45mA
	Sleep/Standby	TBD
Navigation Data Update Rate	1Hz	
Operational Limits	Altitude	Max 18,000m
	Velocity	Max 515m/s
	Acceleration	Less than 4g

Interfaces Configuration

Power Supply: Regulated power for the GT-2217-SF is required. The input voltage V_{cc} should be $3.0V \pm 10\%$, maximum, current is no less than 100mA. Suitable decoupling must be provided by external decoupling circuitry.

Antenna: The GT-2217-SF GPS receiver is designed for supporting the active antenna or passive antenna connected with pin RF_IN. The gain of active antenna should be no less than 15dB. The maximum noise figure should be no more than 2.5dB and output impedance is at 50 Ohm.

UART Ports: The module supports two full duplex serial channels UART0 and UART1. All serial connections are at 3V CMOS logic levels, if need different voltage levels, use appropriate level shifters. The baud rate of both serial ports are fully programmable, the data format is however fixed: X, N, 8, 1, i.e. X baud rate, no parity, eight data bits and one stop bit, no other data formats are supported, LSB is sent first. The modules default baud rate is set up 9600bps, however, the user can change the default baud rate to any value from 4800 bps to 115kbps. UART0 is used e.g. for booting and NMEA interface. UART1 can be utilized for UBP protocol.

Boot Mode Select: The pin Boot is used to set the boot mode of the GT-2217-SF GPS Receiver. By default the receiver will boot in normal GPS mode. If there are corrupted data in FLASH, it may be necessary to boot the receiver in test mode by pulling Boot pin high during a power cycle or hardware reset to update the firmware.

Backup Battery Power: In case of a power failure on pin V_{cc} , real-time clock and

backup RAM are supplied through pin V_BAT. This enables the GT-2217-SF GPS Receiver to recover from power failure with either a hot start or a warm start (depending on the duration of Vcc outage). If no Backup Battery is connected, the receiver performs a cold start upon powered up.

Pin Description

Pin No.	Pin name	I/O	Description	Remark
1	TXB		UART Serial Data Output 1	Leave Open in not used
2	RXB		UART Serial Data Input 1	Pull up if not used
3	TXA	O	UART Serial Data Output 0	Leave Open in not used
4	RXA	I	UART Serial Data Input 0	Pull up if not used
5	NC		No Connection	Leave Open in not used
6	V_IN	I	Module Power Supply	
7	GND	G	Ground	
8	VDD3.0OUT	O	3.0V supply output	Leave Open in not used
9	NC		No Connection	Leave Open in not used
10	Reset	I	Module Reset	Leave Open in not used
11	V_BAT	I	RTC Battery Input	Leave Open in not used
12	BOOT	I	Boot Mode	Leave Open if not used
13	GND	G	Ground	

14	GND	G	Ground	
15	GND	G	Ground	
16	RF_IN	I	Antenna Input	
17	GND	G	Ground	
18	Vcc_3.0V	O	Voltage Output for Active Antenna	May be connected to V_ANT Leave open if not used
19	V_ANT	I	Active Antenna External Voltage Supply	
20	NC		No Connection	Leave open
21	NC		No Connection	Leave open
22	NC		No Connection	Leave open
23	NC		No Connection	Leave open
24	NC		No Connection	Leave open
25	NC		No Connection	Leave open
26	NC		No Connection	Leave open
27	WAKE	I	External Interrupt(for SLEEP)	Leave Open in not used
28	PPS	O	Time pulse Signal	Leave Open in not used

Electrical Characteristics

Absolute Maximum Rating

Parameter	Symbol	Min	Max	Units
Power Supply				
Power Supply Volt.	V_IN	-0.3	3.6	V
Input Pins				
Input Pin Voltage I/O	Reset	-0.3	3.6	V
Input Pin Voltage I/O	RXB,RXA	-0.3	3.6	V
Input Pin Voltage I/O	BOOT	-0.3	3.6	V
Antenna Bias DC Voltage	V_ANT	-0.3	3.6	V
Backup Battery	V_BAT	2.0	3.6	V
Environment				
Storage Temperature	Tstg	-40	125	°C
Peak Reflow Soldering	Tpeak		260	°C
Humidity			95	%

Note: Absolute maximum ratings are stress ratings only, and functional operation at the maxims is not guaranteed. Stress beyond the limits specified in this table may affect device reliability or cause permanent damage to the device. For functional operating conditions, refer to the operating conditions tables as follow.

Operating Conditions

Parameter	Symbol	Condition	Min	Typ	Max	Units
Power supply voltage	V _{CC}		3.0		3.3	V
Power supply voltage ripple	V _{CC_PP}	V _{CC} =3.0V			30	mV
Consumption current	I _{CC}	V _{CC} =3.0V		40	45	mA
Input high voltage	V _{IH}		0.7xV _{CC}		V _{CC} +1.0	V
Input low voltage	V _{IL}		-0.3		0.3xV _{CC}	V
Output high voltage	V _{OH}		0.8xV _{CC}		V _{CC}	V
Output low voltage	V _{OL}		0		0.2xV _{CC}	V
Operating temperature	Topr		-40		85	°C

Mechanical Specification

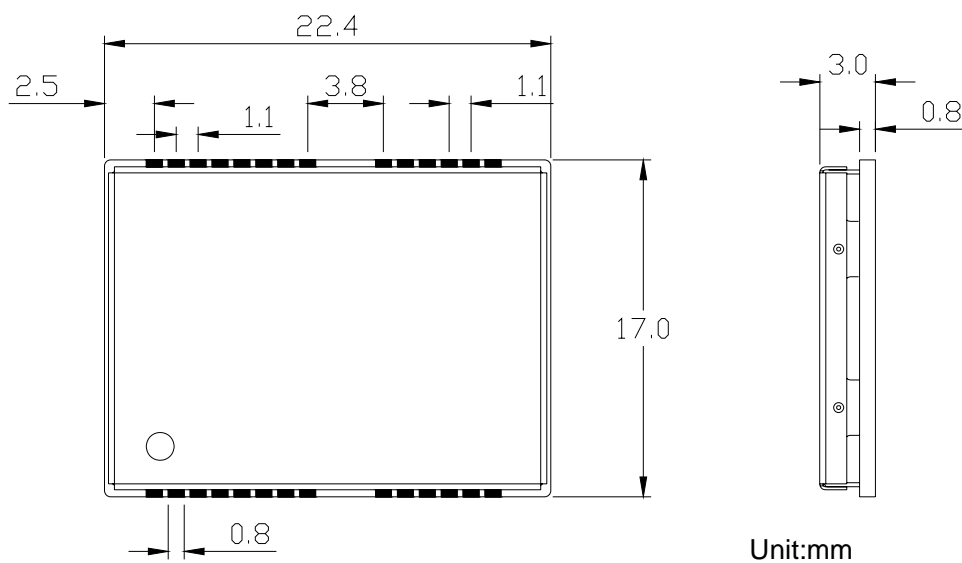


Figure 3: GT-2217-SF Dimensions

Software Protocol

NMEA 0183 Protocol

The NMEA protocol is an ASCII-based protocol, Records start with a \$ and with carriage return/line feed. GPS specific messages all start with \$GPxxx where xxx is a three-letter identifier of the message data that follows. NMEA messages have a checksum, which allows detection of corrupted data transfers.

The Gotop GT-2217-SF supports the following NMEA-0183 messages: GGA, GLL, GSA, GSV, RMC and VTG.

Table 1: NMEA-0183 Output Messages

NMEA Record	DESCRIPTION
GGA	Global positioning system fixed data
GLL	Geographic position—latitude/longitude
GSA	GNSS DOP and active satellites
GSV	GNSS satellites in view
RMC	Recommended minimum specific GNSS data
VTG	Course over ground and ground speed

GGA-Global Positioning System Fixed Data

Table 2 contains the values of the following example:

\$GPGGA, 161229.487,3723.2475,N, 12158.3416,W, 1,07,1.0,9.0,M.0000*18

Table 2: GGA Data Format

Name	Example	Units	Description
Message ID	\$GPGGA		GGA protocol header
UTC Position	161229.48		hhmmss.sss
Latitude	3723.2457		ddmm.mmmm
N/S indicator	N		N=north or S=south
Longitude	12158.341		ddmm.mmmm
E/W Indicator	W		E=east or W=west
Position Fix	1		See Table 2-1
Satellites Used	07		Range 0 to 12
HDOP	1.0		Horizontal Dilution of Precision
MSL Altitude	9.0	meters	
Units	M	meters	
Geoids Separation		meters	
Units	M	meters	
Age of Diff.Corr.		second	Null fields when DGPS is not Used
Diff.Ref.Station ID	0000		
Checksum	*18		
<CR> <LF>			End of message termination

Table 2-1: Position Fix Indicators

Value	Description
0	Fix not available or invalid
1	GPS SPS Mode, fix valid
2	Differential GPS, SPS Mode, fix valid
3	GPS PPS Mode, fix valid

GLL-Geographic Position – Latitude/Longitude

Table 3 contains the values of the following example:

\$GPGLL , 3723.2475, N,12158.3416, W,161229.487, A*2C.

Table 3: GLL Data Format

Name	Example	Units	Description
Message ID	\$GPGLL		GLL protocol header
Latitude	3723.2475		Ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		Ddmm.mmmm
E/W Indicator	W		E=east or W=west
UTC Position	161229.487		Hhmmss.sss
Status	A		A=data valid or V=data not valid
Checksum	*2C		
<CR> <LF>			End of message termination

GSA-GNSS DOP and Active Satellites

Table 4 contains the values of the following example:

\$GPGSA , A, 3, 07, 02, 26,27, 09, 04,15, , , , , 1.8,1.0,1.5*33.

Table 4: GSA Data Format

Name	Example	Units	Description
Message	\$GPGSA		GSA protocol header
Mode 1	A		See Table 4-2
Mode 2	3		See Table 4-1
Satellite Used	07		Sv on Channel 1
Satellite Used	02		Sv on Channel 2
...
Satellite Used			Sv on Channel 12
PDOP	1.8		Position Dilution of Precision
HDOP	1.0		Horizontal Dilution of Precision
VDOP	1.5		Vertical Dilution of Precision
Checksum	*33		
<CR> <LF>			End of message termination

Table 4-1: Mode 1

Value	Description
1	Fix not available
2	2D
3	3D

Table 4-2: Mode 2

Value	Description
M	Manual-forced to operate in 2D or 3D mode
A	Automatic-allowed to automatically switch 2D/3D

GSV-GNSS Satellites in View

Table 5 contains the values of the following example:

\$GPGSV , 2, 1, 07, 07, 79,048, 42, 02, 51,062, 43, 26, 36,256, 42, 27, 27, 138,42*71

\$GPGSV, 2, 2, 07, 09, 23,313, 42, 04, 19, 159, 41, 15,12,041, 42*41.

Table 5: GGA Data Format

Name	Example	Units	Description
Message ID	\$GPGSV		GSV protocol header
Number of	2		Range 1 to 3
Message Number	1		Range 1 to 3

Satellites in View	07		
Satellite ID	07		Channel 1(Range 1 to 32)
Elevation	79	degrees	Channel 1(Maximum 90)
Azinmuth	048	degrees	Channel 1(True, Range 0 to 359)
SNR(C/NO)	42	dBHz	Range 0 to 99,null when not tracking
...			...
Satellite ID	27		Channel 4(Range 1 to 32)
Elevation	27	degrees	Channel 4(Maximum 90)
Azimuth	138	degrees	Channel 4(True, Range 0 to 359)
SNR(C/NO)	42	dBHz	Range 0 to 99, null when not tracking
Checksum	*71		
<CR> <LF>			End of message termination

Depending on the number of satellites tracked multiple messages of GSV data may be required.

RMC-Recommended Minimum Specific GNSS Data

Table 6 contains the values of the following example:

\$GPRMC, 161229.487, A, 3723.2475, N, 12158.3416, W, 0.13,309.62, 120598,, *10

Table 6: RMC Data Format

Name	Example	Units	Description
Message ID	\$GPRMC		RMC protocol header
UTS Position	161229.487		hhmmss.sss
Status	A		A=data valid or V=data not valid
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		Ddmm.mmmm
E/W Indicator	W		E=east or W=west
Speed Over Ground	0.13	Knots	
Course Over	309.62	Degrees	True
Ground			
Date	120598		Dummy
Magnetic variation		Degrees	E=east or W=west
Checksum	*10		
<CR> <LF>			End of message termination

VTG-Course Over Ground and Ground Speed


Table 7 contains the values of the following example:


\$GPVTG, 309.62, T, M, 0.13, N, 0.2, K*6E

Table 7: VTG Data Format

Name	Example	Units	Description
Message ID	\$GPVTG		VTG protocol header
Course	309.62	Degrees	Measured heading
Reference	T		True
Course		Degrees	Measured heading
Reference	M		Magnetic
Speed	0.13	Knots	Measured horizontal speed
Units	N		Knots
Speed	0.2	Km/hr	Measured horizontal speed
Units	K		Kilometer per hour
Checksum	*6E		
<CR> <LF>			End of message termination

RECOMMENDED REFLOW PROFILE

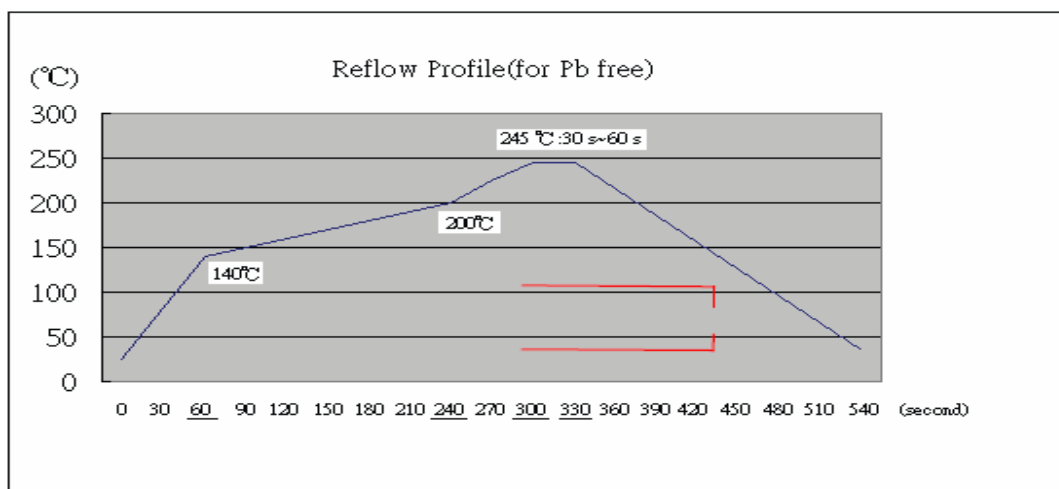

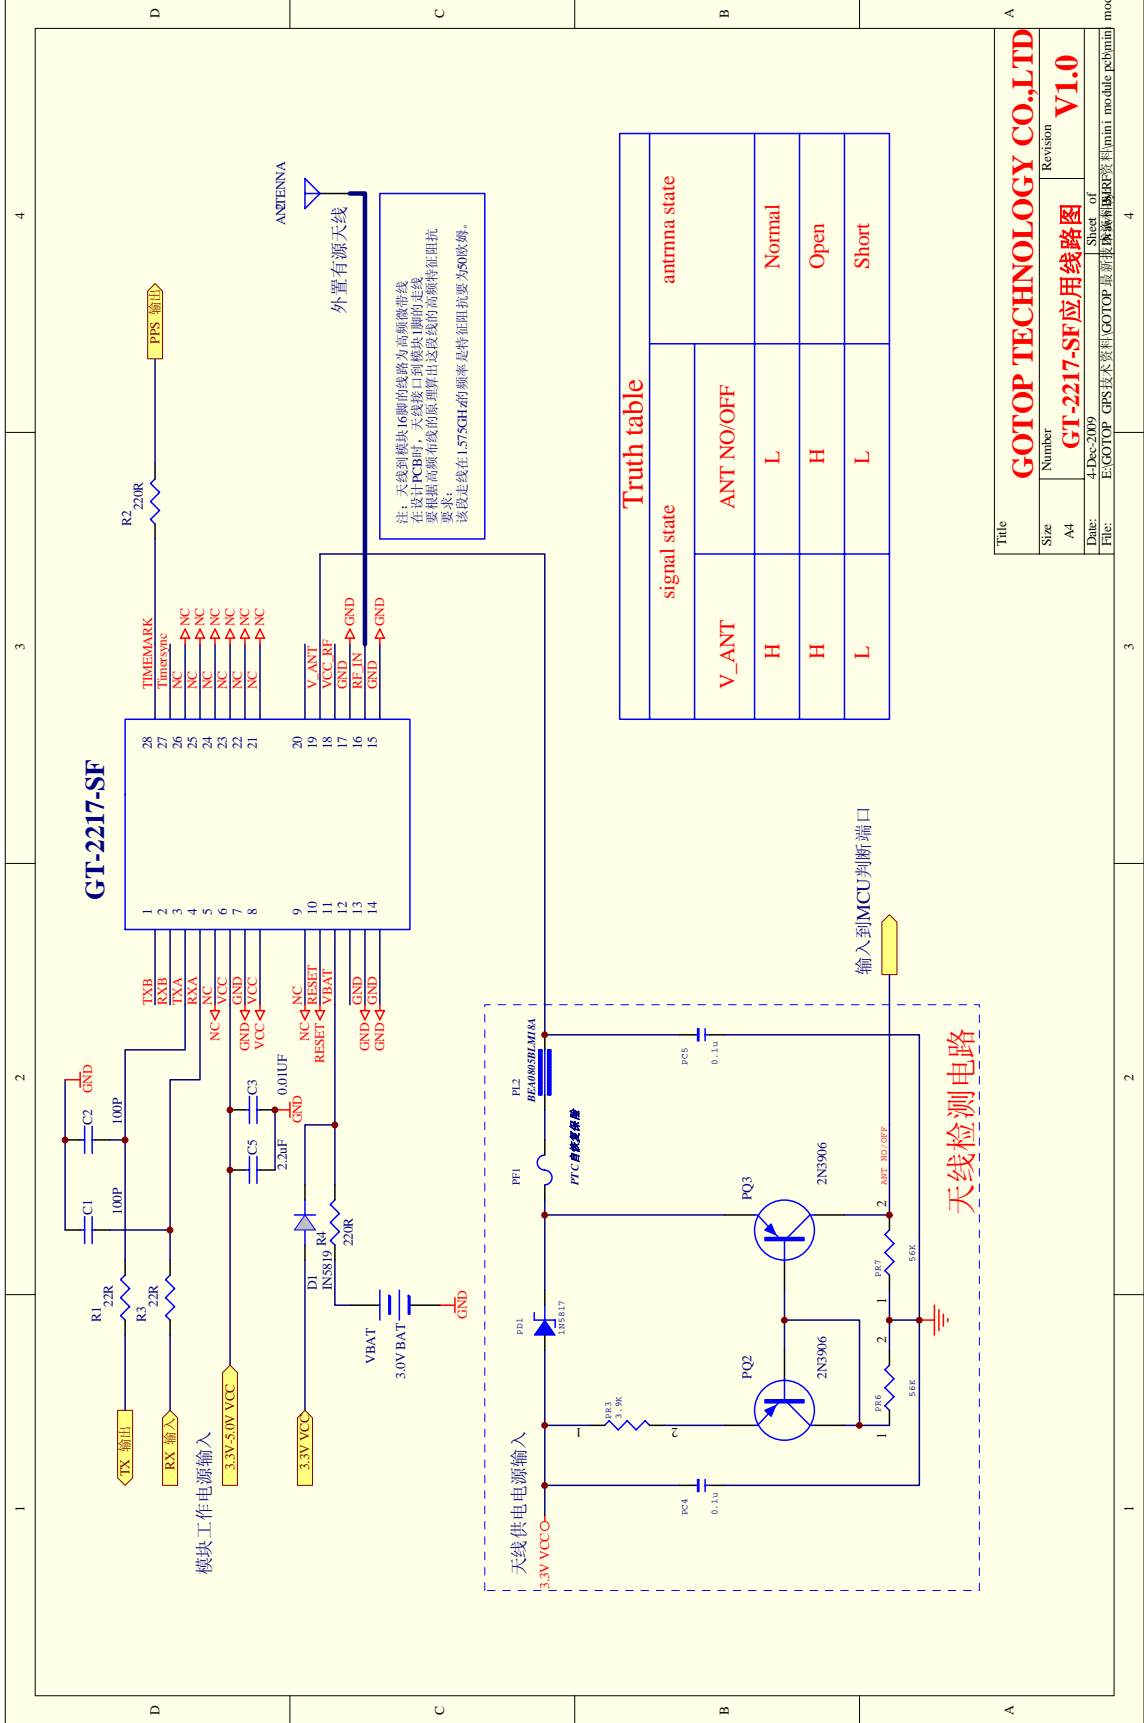

注：天线到模块16脚的线路为高频微带线，在设计PCB时，天线接口到模块1脚的走线要根据高频微带线的原理算出这段线的高频特征阻抗要求，这段走线在1.575GHz的频率是特征阻抗为50欧姆。

Truth table

signal state		antenna state
V_ANT	ANT NO/OFF	
	L	Normal
	H	Open
	L	Short

天线检测电路

Title: **GOTOP TECHNOLOGY CO.,LTD**
 Size: A4
 Number: **GT-2217-SF应用线路图**
 Revision: **V1.0**
 Date: 4-Dec-2009
 Sheet of 1
 File: E:\GOTOP_GPS技术资料\GOTOP_最新北桥资料\模块资料\mini module pcb\mini module pcb.dwg

©Copyright 2008 Gotop Technology Co., Ltd. All Right Reserved

The information contained herein is subject to change without notice.

Gotop Technology Co. , LTD

Add:Room506,TechnologyBuiding,DuoliIndustrialPark,ShangMeilin,FutianDistrict,ShenzhenZhenCityChina

Phone: 86-755-23804156

fax: 86-755-23804155

N 22° 32' 17", E 114° 07' 07"

<http://www.gotop-zzu.com>

Not to be reproduced in whole or part for any purpose without written permission of Gotop Technology Inc ('Gotop'). Information provided by Gotop is believed to be accurate and reliable. These materials are provided by Gotop as a service to its customers and may be used for informational purposes only. Gotop assumes no responsibility for errors or omissions in these materials, nor for its use. Gotop reserves the right to change specification at any time without notice.

These materials are provided 'as is' without warranty of any kind, either expressed or implied, relating to sale and/or use of Gotop products including liability or warranties relating to fitness for a particular purpose, consequential or incidental damages, merchantability, or infringement of any patent, copyright or other intellectual property right. Gotop further does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these materials. Gotop shall not be liable for any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of these materials. Gotop products are not intended for use in medical, life-support devices, or applications involving potential risk of death, personal injury, or severe property damage in case of failure of the product.